

Arduino controlled valvometry equipment for mussel raft monitoring

Miguel Gilcoto¹, Waldo Redondo-Caride², Elsa Silva¹, Antón Velo¹, Luc A. Comeau³, Ramón Filgueira⁴, José M.F. Babarro¹

¹ Instituto de Investigaciones Marinas (IIM-CSIC, Eduardo Cabello 6, 36208 Vigo, 986231930, mgilcoto@iim.csic.es, elsi@iim.csic.es, avelo@iim.csic.es, jbabarro@iim.csic.es)

² Centro Oceanográfico de Vigo (IEO, Subida a Radio Faro 50-52, 36390 Vigo, +34986492111, waldo.redondo@ieo.csic.es)

³ Fisheries and Oceans Canada, Gulf Fisheries Centre, 343 Université Avenue, Moncton, New Brunswick E1C 9B6, Canada, Luc.Comeau@dfo-mpo.gc.ca)

⁴ Marine Affairs Program, Dalhousie University, Halifax, NS, Canada, Ramon.Filgueira@dal.ca

Abstract – High-Frequency Non-Invasive (HFNI) instruments are currently used in bivalve mollusks in order to use them as bio-indicators of the local conditions of the environment. Under the STRAUSS project an Arduino controlled equipment has been developed to log the valve movements activity of mussels (*Mytilus galloprovincialis*) using Hall-effect sensors. The equipment is able to record at 10Hz the signals of 27 Hall-sensors, temperature, fluorescence and , to store the records in internal microSD cards and to send the stream of data to in premisses data servers for storing and plotting them.

Keywords – HFNI, Arduino, Hall-effect, bio-sensor.

I. MOTIVATION

There is an increasing demand, when socioeconomic implications exist (e.g. shellfisheries), to understand the impacts of coastal environments variability on marine fauna. The use of biosensors is playing an key role on exploring natural environmental variability and a number of natural and anthropogenic stressors. Emerging monitoring systems and technologies, as High-Frequency Non-Invasive (HFNI) instruments, are also being very useful [1]. Since they are bio-indicators of the local conditions, bivalve mollusks are target organisms for this type of studies combining biosensors and HFNI. Several devices have been implemented for both laboratory and field experiments and used as early warning alerts in environmental monitoring through changes in animal's behaviour (e.g. MolluSCAN eye; [1]). In fact, from valve's movements of these organisms it is possible to infer individuals' health or status [2].

The amplitude and frequency of valve opening would be an indication of stress, modulations in these variables may offer signalling of environmental change. The use of these bio-sensors includes the gluing a Hall-effect sensor in one valve and a magnet in the other valve (Fig 1c), the intensity of the magnetic field felt by the sensor will change with the distance between the two valves.

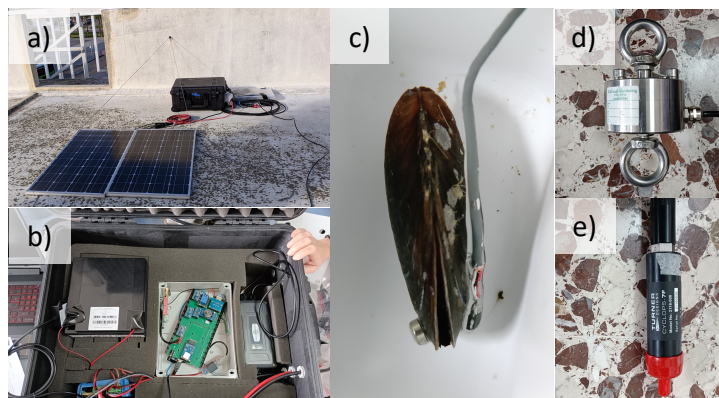


Fig 1. a) Equipment on the IIM terrace, b) case with electronics and battery, c) mussel with magnet and hall sensor, d) load cell, and e) fluorometer.

HFNI valvometry has been already successfully applied to mussels in Galician waters and laboratory studies, under natural variability rhythms of mussels attached to cultivation system (rafts [3]) and under toxic *Alexandrium minutum* exposure in experimental tanks [4], respectively. Recently, the impact of ocean acidification and seawater warming on populations of the Mediterranean mussel *Mytilus galloprovincialis* were also explored using this technology [5,6]. In these cases, very expensive devices were used though cheaper options are available [7]. Trying to reduce costs, we have developed an Arduino controlled equipment (Figure 1a).

II. EQUIPMENT DESCRIPTION

The hardware components of the equipment were integrated in a Mega2560 R3 Arduino board (Table 1) through a custom-made PCB (Fig. 1b) designed by Javier Vila (<https://vilabesada.com>). The final global design was polished by SC Robotics (<https://scrobotics.com>). Several sensors have been added to monitor other interesting variables: a load cell unit (Fig. 1d) to record the weight change in the mussel ropes of the raft, a fluorometer sensor (Fig. 1e) to estimate chlorophyll water content, an Inertial Movement Unit to monitor the mussel raft movements under ocean waves, and a temperature sensor. The equipment has been designed to operate as an autonomous instrument with solar panels, batteries and GPRS communication with the data servers at IIM premises. A microSD card adapter serves main storage system, and a real time clock (RTC) is used to timestamp each record stored in the SD card. The data stream arriving at the data servers is stored in a InfluxDB database. The InfluxDB database is connected to a Grafana visualization platform that, in turn, can plot the data through dashboards in any Internet browser.

Component description	Model/Version
Hall-effect Sensor	49E
Cable from sensor to AD converter	MOGAMI AWG33 -3C
Real Time Clock Module	Adafruit DS3231
MicroSD Card Adapter Module	HW-115
Analog-to-Digital Converter Module	Adafruit ADS1115
Power Supply Unit	Mean Well 5V-5A
Arduino board	Elegoo Mega2560 R3
Temperature sensor	DS18B20
Fluorometer	Turner Cyclops – 7F
Load Cell	JCM Load Monitoring, TNC600
IMU	MPU9250
Communications (GPRS)	SIM900
Solar Panels	2x100W
Solar Charge Controller	Victron MPPT 75 10
Battery	LiFePO4, 12.8V 26.6Ah
PCB	Custom-made
Database Software	InfluxDB
Visualization	Grafana 7.3.6 and FireFox/Chrome/Safari

Table 1. System/Equipment components

III. CONCLUSIONS

In the context of STRAUSS project, a real-time monitoring system has been developed, using an Aduino controlled equipment with 27 Hall-effect sensors sampled at 10Hz, to log the valvometry activity on clams *Mytilus galloprovincialis* plus a load cell, a fluorometer, an IMU and a temperature sensor in order assess the effects of waves in mussel dislodgments.

ACKNOWLEDGMENTS

The authors also would like to thank the support of project STRAUSS (PID2019-106008RB-C21), funded by MCIN/AEI/10.13039/501100011033, and project ATLAZUL (0755_ATLAZUL_6_E), co-funded by the INTERREG V-A Spain-Portugal Cooperation Program (POCTEP) 2014-2020.

REFERENCES

- [1] Andrade, H., Massabuau, J.C., Cochrane, S., Ciret, P., 627 Tran, D., Sow, S., and Camus, L., “High Frequency Non-invasive (HFNI) Bio-Sensors As a Potential Tool for Marine Monitoring and Assessments”, *Front. Mar. Sci.* vol. 8, pp. 137, 2016, doi: 10.3389/fmars.2016.00187
- [2] Nagai, K., Honjo, T., Go, J., Yamashita, H., Seok Jin, O., “Detecting the shellfish killer *Heterocapsa circularisquama* (Dinophyceae) by measuring bivalve valve activity with a Hall element sensor”, *Aquaculture* vol. 255, pp. 395–401, 2006
- [3] Comeau, L.A., Babarro, J.M.F., Longa, A., Padin, X.A., “Valve-gaping behavior of raft-cultivated mussels in the Ria de Arousa, Spain”, *Aquacult Rep* vol. 9, pp. 68–73, 2018, doi: 10.1016/j.aqrep.2017.12.005
- [4] Comeau, L.A., Babarro, J.M.F., Rioboó, P., Scarratt, M., Starr, M., Tremblay, R., “PSP-producing dinoflagellate *Alexandrium minutum* induces valve microclosures in the mussel *Mytilus galloprovincialis*”, *Aquaculture* vol. 500, pp. 407–413, 2019, doi: 10.1016/j.aquaculture.2018.10.025
- [5] Lassoued, J., Babarro, J.M.F., Padin, X.A., Comeau L.A., Bejaoui, N., Pérez, F.F., “Behavioural and eco-physiological responses of the mussel *Mytilus galloprovincialis* to acidification and distinct feeding regimes”, *Mar. Ecol. Prog. Ser.* Vol. 626, pp. 97–108, 2019, doi: 10.3354/meps13075
- [6] Lassoued, J., Padin, X.A., Comeau, L.A., Bejaoui, N., Pérez F.F., Babarro, J.M.F., “The Mediterranean mussel *Mytilus galloprovincialis*: responses to climate change scenarios as a function of the original habitat”, *Conserv. Physiol.* vol. 9(1), pp. coaa114, doi:10.1093/conphys/coaa114
- [7] Gandra, M., Seabra, R., Lima, F.P., “A low- cost, versatile data logging system for ecological applications”, *Limnol. Oceanogr: Meth.* vol. 13(3), pp. 115-126, 2015, doi: 10.1002/lom3.10012